

APP CRS	Rwy Idg	8016
101°	THRE	9
	Apt Elev	9

RNAV (GPS) RWY 10

LUIS MUNOZ MARIN INTL (SJU)(TJSJ)

WAAS VNAV NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR, increase LNAV/VNAV visibility all Cats to 1¼ and increase LNAV Cats C/D visibility to 1½.



MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct DEEDY and hold.




ATIS
125.8

SAN JUAN APP CON
119.4 269.2 (WEST & SW)
120.9 290.2 (NORTH & EAST)

SAN JUAN TOWER
132.05 257.8

GND CON
121.9 348.6

CLNC DEL
126.4 284.6

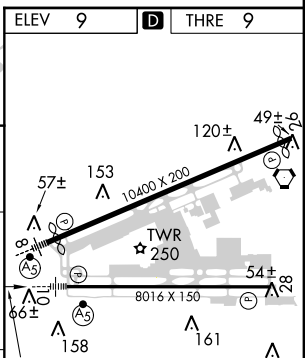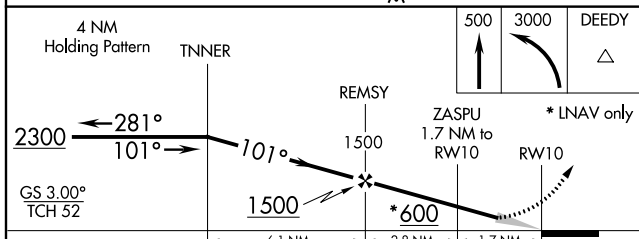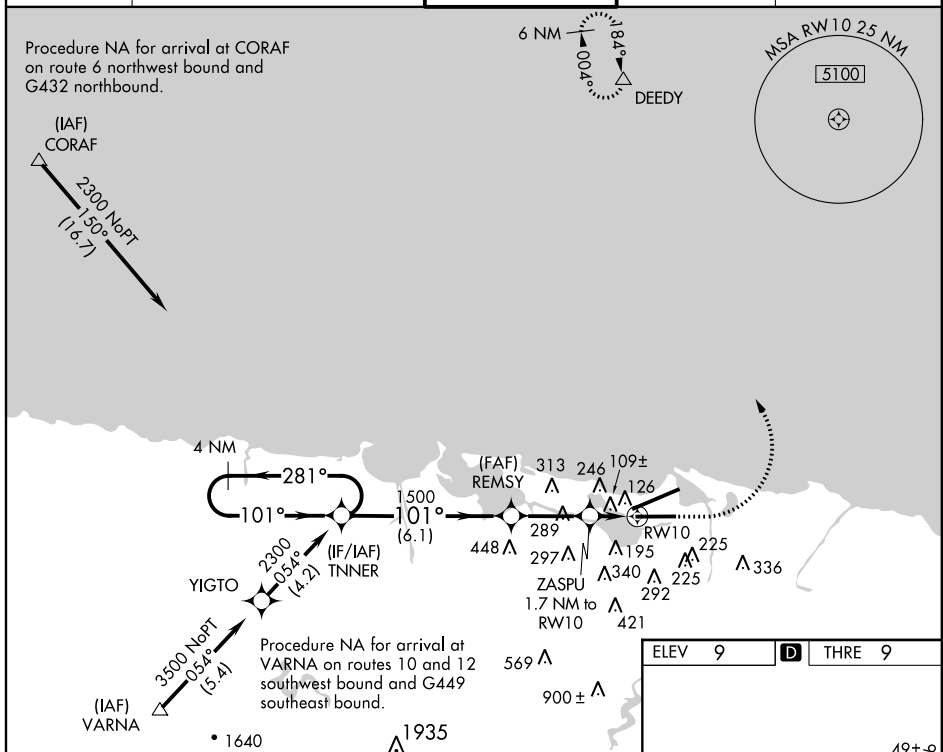

CATEGORY	A	B	C	D
LNAV/VNAV DA	407-7/8 398 (400-7/8)			
LNAV MDA	480-1/2	471 (500-1/2)	480-1	471 (500-1)
CIRCLING	600-1	591 (600-1)	600-1 1/2	600-2
			591 (600-1 1/2)	591 (600-2)

REIL Rwy 26
HIRL Rwys 8-26 and 10-28

SE-3, 08 JAN 2015 to 05 FEB 2015

SE-3, 08 JAN 2015 to 05 FEB 2015